



rsf

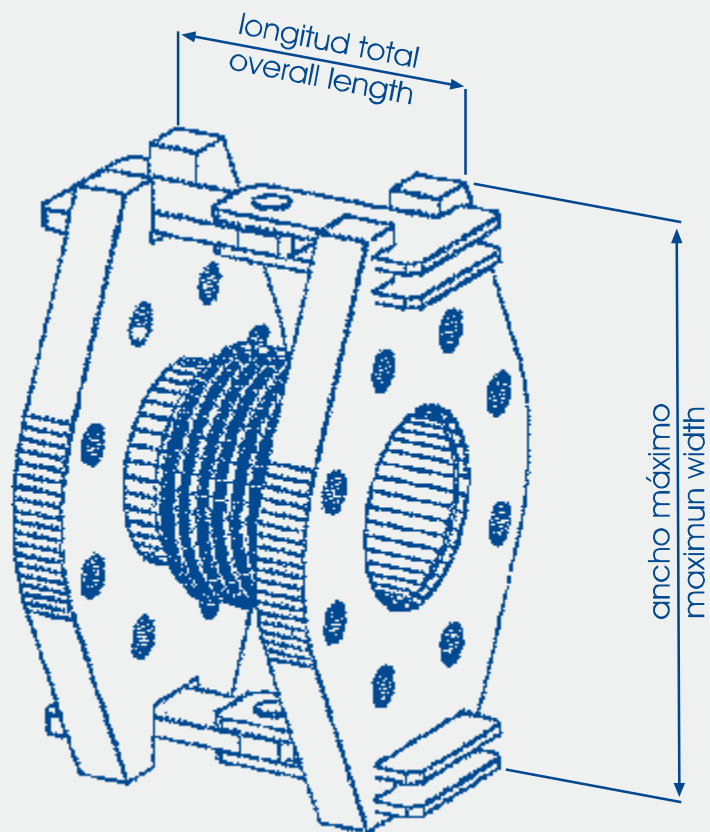

rsW

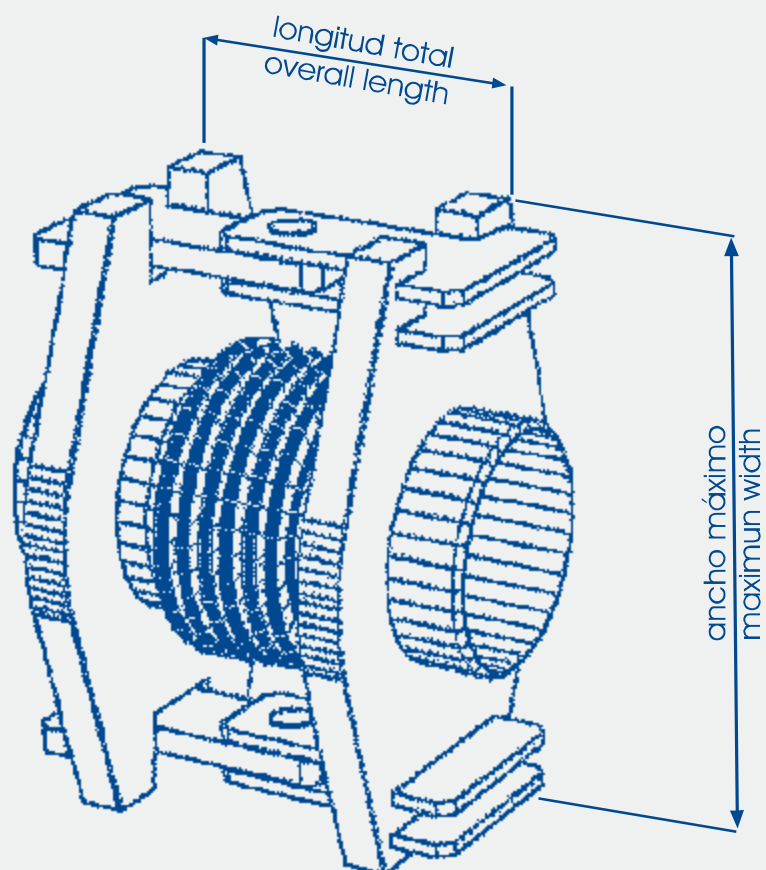

PN 16

DIÁMETRO NOMINAL	ROTACIÓN ANGULAR	RIGIDEZ ANGULAR	MOMENTO DE FRICCIÓN	RSF		RSW	
				LONGITUD TOTAL	ANCHO MÁXIMO	LONGITUD TOTAL	ANCHO MÁXIMO
NOMINAL DIAMETER	ANGULAR ROTATION	ANGULAR SPRING RATE	FRICTION MOMENT	OVERALL LENGTH	MAXIMUM WIDTH	OVERALL LENGTH	MAXIMUM WIDTH
	Deg	N-m/Deg	N-m/Bar	mm	mm	mm	mm
80	16	8,70	1	163	288	293	238
100	13	23,30	1,6	172	308	302	265
100	16	14,60	1,6	215	308	345	265
125	13	29,80	2,3	181	338	313	292,1
125	16	18,60	2,3	228	338	360	292,1
150	12	42,40	3,4	209	373	329	328
150	14	26,50	3,4	260	373	380	328
200	11	100,90	8,5	238	474	348	410,5
200	16	63	8,5	296	474	406	410,5
250	10	138,90	12,9	255	539	365	462,3
250	16	86,80	12,9	318	539	428	462,3
300	8	403	23,9	281	626	391	552,7
300	12	251,80	23,9	354	626	464	552,7
350	8	419,20	28,7	291	686	405	588,5
350	12	262	28,7	366	686	480	588,5
400	8	511,70	41,9	321	746	511	643,4
400	12	319,80	41,9	397	746	587	643,4
450	8	802,40	58,3	350	806	436	698,1
450	12	501,30	58,3	437	806	523	698,1
500	7	1073,90	78,4	369	909	455	773,4
500	12	671,20	78,4	463	909	549	773,4
600	7	1516,40	131,7	400	1034	484	882,3
600	12	947,80	131,7	500	1034	584	882,3