



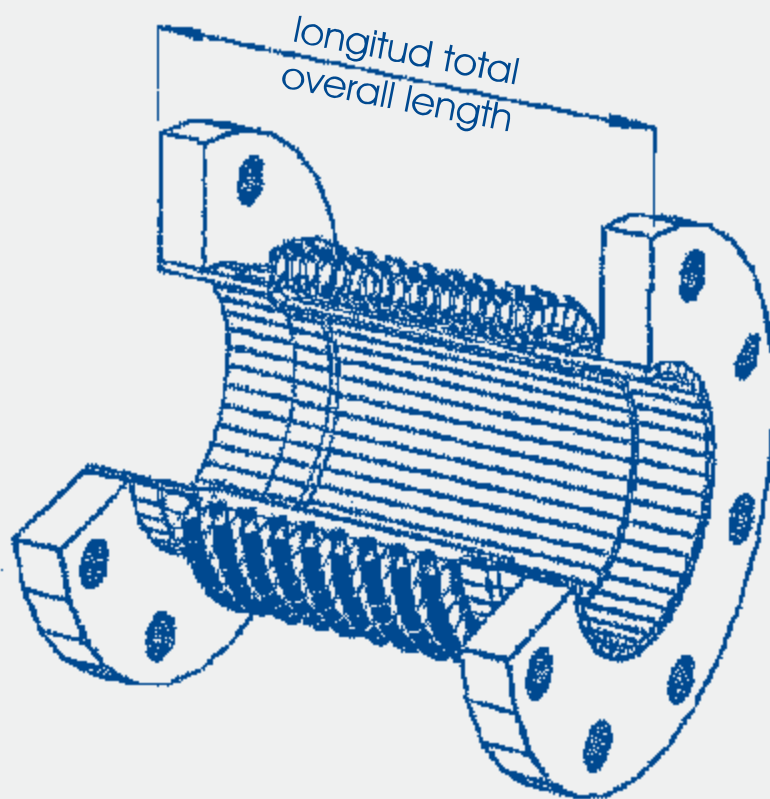

asf

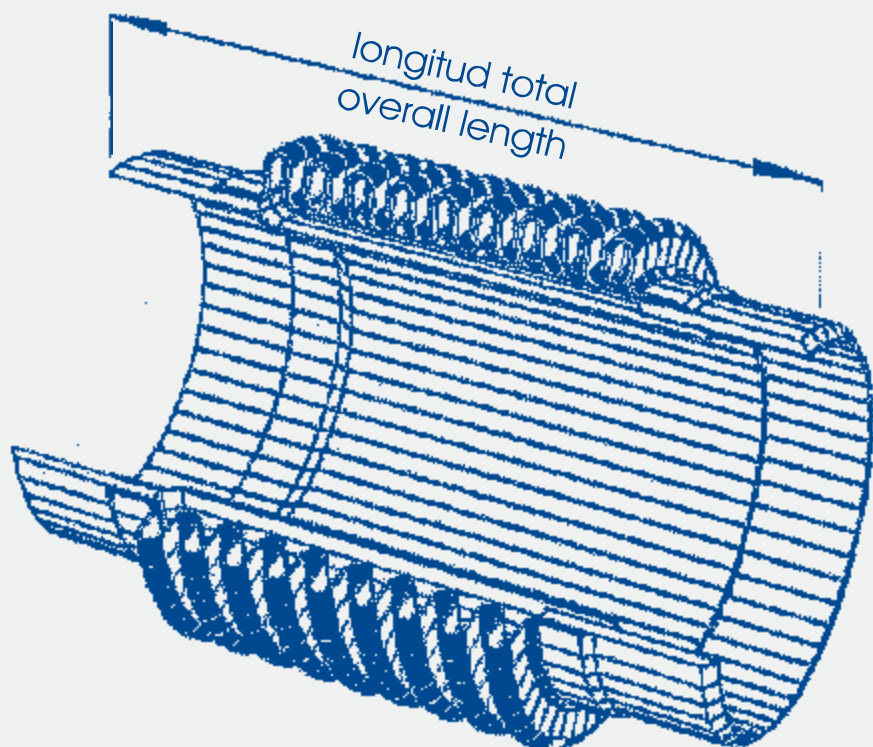

asw

EXHAUSTACIÓN

DIÁMETRO NOMINAL <i>NOMINAL DIAMETER</i>	MOVIMIENTO AXIAL <i>AXIAL MOVEMENT</i>	ÁREA EFECTIVA <i>EFFECTIVE AREA</i>	RIGIDEZ AXIAL <i>SPRING RATE</i>	LONGITUD TOTAL OVERALL LENGTH	
				ASW	ASF
-	(±) mm	cm ²	N/mm	mm	mm
200	30	454	68	320	280
250	40	693	60	320	280
300	40	956	62	340	300
350	50	1.097	54	340	300
400	50	1.490	72	340	300
450	55	1.858	54	340	300
500	55	2.283	66	320	300
550	55	2.751	115	320	300
600	60	3.257	115	320	300
650	60	3.794	114	320	300
700	70	4.394	105	320	300
750	70	5.027	125	310	300
800	60	5.701	123	310	300
850	60	6.444	105	310	300
900	60	7.175	190	310	300
1000	50	8.805	244	300	280
1100	50	10.656	238	300	280
1200	50	12.604	228	300	280

PN 6

DIÁMETRO NOMINAL NOMINAL DIAMETER	MOVIMIENTO AXIAL AXIAL MOVEMENT	ÁREA EFFECTIVA EFFECTIVE AREA	RIGIDEZ AXIAL SPRING RATE	LONGITUD TOTAL OVERALL LENGTH	
				ASW	ASF
-	(±) mm	cm ²	N/mm	mm	mm
40	10	98	70,8	260	210
40	14	109	51,5	290	235
50	7	127	101	235	190
50	12	140	63,2	265	215
50	17	153	45,9	290	240
65	9	199	87,2	240	200
65	17	214	54,5	270	225
65	22	262	61,3	310	260
80	11	265	75,3	245	200
80	18	283	47,1	280	235
80	26	338	52,8	315	275
100	14	427	68,2	250	205
100	22	449	42,6	290	240
100	25	474	68	325	280
125	13	627	133	260	216
125	22	654	82,8	300	260
125	31	737	91,9	350	320
150	17	953	125	270	230
150	26	986	78,3	310	270
150	37	1.088	86,6	360	350
200	20	1.598	110	275	240
200	32	1.640	69	325	300
200	47	1.771	76	390	390
250	26	2.498	145	285	260
250	42	2.579	90,4	340	345
250	47	2.666	123	410	415
300	23	3.444	168	310	260
300	37	3.507	105	375	350
300	55	3.698	115	455	450
350	22	4.128	243	315	270
350	36	4.197	152	380	360
350	50	4.266	111	450	450
400	25	5.379	228	320	275
400	40	5.458	143	390	370
400	55	5.536	104	460	470
450	35	6.860	192	355	315
450	57	6.993	120	430	430
450	67	7.154	147	530	530
500	37	8.449	205	380	325
500	60	8.596	128	460	450
500	70	8.755	156	565	560
600	38	12.006	281	410	345
600	61	12.182	175	490	470
600	81	12.600	187	620	610

PN 16

DIÁMETRO NOMINAL NOMINAL DIAMETER	MOVIMIENTO AXIAL AXIAL MOVEMENT	ÁREA EFECTIVA EFFECTIVE AREA	RIGIDEZ AXIAL SPRING RATE	LONGITUD TOTAL OVERALL LENGTH	
				ASW	ASF
				ASW	ASF
-	(±) mm	cm ²	N/mm	mm	mm
40	7	24	152	260	215
40	10	24	111	290	240
50	9	36	137	270	225
50	13	36	155	310	260
65	7	57	291	250	210
65	12	57	182	290	240
65	17	57	132	320	275
80	9	77	252	250	210
80	14	77	158	290	250
80	17	77	211	330	290
100	9	124	422	260	220
100	15	124	264	300	260
100	20	124	192	340	300
125	11	179	372	265	230
125	18	179	233	310	280
125	25	179	169	355	320
150	13	270	352	275	240
150	21	270	220	320	290
150	25	271	267	375	340
200	14	449	504	285	260
200	23	449	315	340	310
200	31	449	229	395	375
250	17	687	453	290	265
250	27	687	283	350	325
250	40	687	275	425	425
300	15	954	948	330	290
300	25	954	592	400	355
300	34	954	431	470	440
350	17	1,147	819	330	290
350	28	1,147	512	400	370
350	39	1,147	372	475	460
400	19	1,488	771	335	300
400	31	1,488	482	410	380
400	42	1,488	351	480	475
450	23	1,867	964	370	325
450	37	1,867	602	455	440
450	51	1,867	438	540	550
500	24	2,280	1,028	400	340
500	39	2,280	643	490	455
500	53	2,280	467	580	570
600	31	3,241	1,049	430	370
600	49	3,241	656	530	510
600	68	3,241	477	630	640