

IPR Series

Reciprocating piston pump



Applications:


General services onboard:

- Bidge
- Ballast
- Deck washing
- Fire fighting

More information:

www.ksb.com/products

IPR Series - Reciprocating piston pump

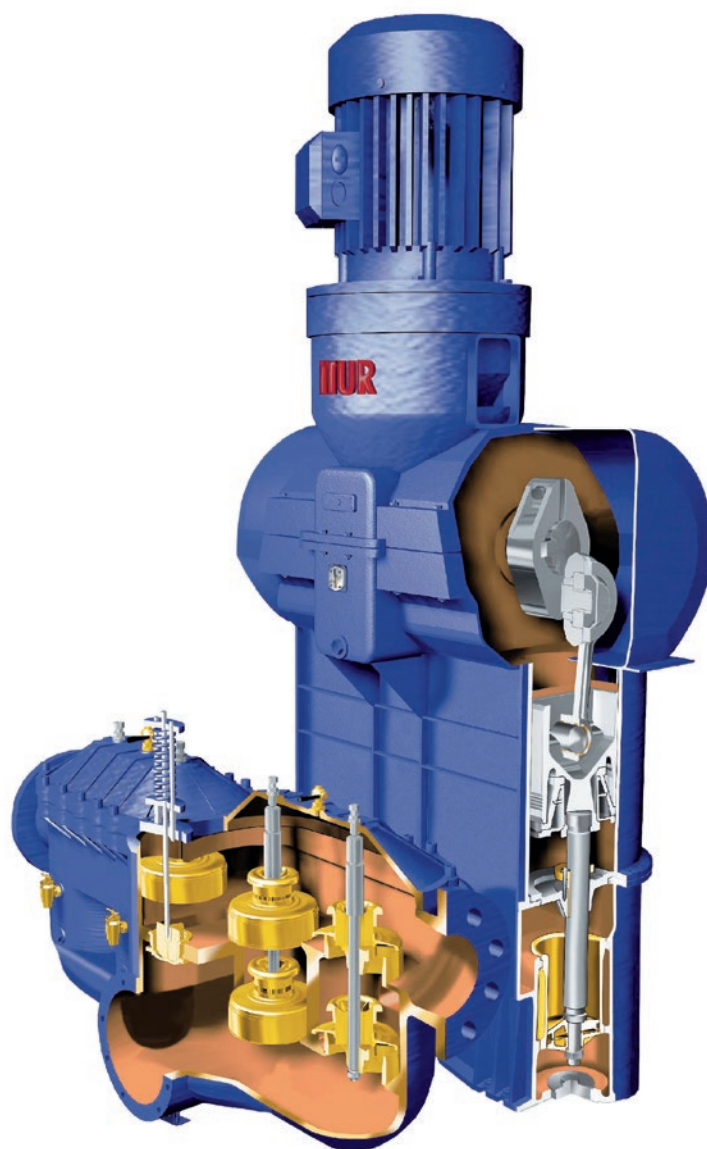

■ Positive displacement

■ Robust design

■ Reciprocating pistons

■ Reliable, safe and durable

Materials

Pump cylinder:	GG-25 / GCuSn5ZnPb
Valve box:	GG-25 / GCuSn5ZnPb
Piston and liner:	GCuSn5ZnPb
Valves:	GCuSn10
Piston rod:	AISI-431B
Connecting rod:	GS45

Technical data*

Sizes:	DN 80 - 150
Maximum flow:	Up to 150 m ³ /h (50 Hz) Up to 178 m ³ /h (60 Hz)
Maximum head:	70 m
Maximum pressure:	10 bar
Motor maximum speed:	Up to 1500 rpm (50 Hz) Up to 1750 rpm (60 Hz)
Piston maximum speed:	240 rpm
Temperature:	5 up to 50°C

* For any application beyond this limit, please contact KSB. All data given in this document are for standard construction.



KSB ITUR Spain, S.A.
www.ksb.es